




PROFIL	PJ	PK	PL	PM
podziałka (p = mm)	2,34	3,56	4,7	9,4
wysokość (h = mm)	3,5	5,5	7	13

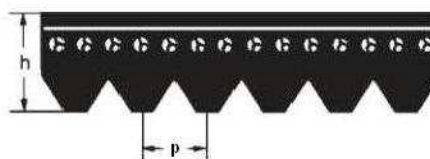

Profil PJ	
Długość efektywna	
mm	cal
306	12,1
330	13,0
356	14,0
381	15,0
406	16,0
432	17,0
457	18,0
483	19,0
508	20,0
533	21,0
559	22,0
584	23,0
610	24,0
635	25,0
660	26,0
711	28,0
723	28,5
762	30,0
787	31,0
813	32,0
838	33,0
864	34,0
889	35,0
914	36,0
938	36,9
960	37,8
995	39,2
1016	40,0
1041	41,0
1059	41,7
1080	42,5
1092	43,0
1110	43,7
1118	44,0
1126	44,3
1130	44,5
1143	45,0
1150	45,3
1168	46,0
1200	47,3

Profil PJ	
Długość efektywna	
mm	cal
1210	47,6
1222	48,1
1233	48,6
1244	49,0
1262	49,7
1270	50,0
1280	50,4
1295	51,0
1301	51,2
1315	51,8
1321	52,0
1333	52,5
1355	53,4
1372	54,0
1397	55,0
1428	56,2
1473	58,0
1549	61,0
1600	63,0
1651	65,0
1663	65,5
1752	69,0
1854	73,0
1895	74,6
1910	75,2
1956	77,0
1992	78,4
2019	79,5
2083	82,0
2155	84,9
2210	87,0
2286	90,0
2337	92,0
2413	95,0
2489	98,0
3154	124,2
3500	137,8
4000	157,5

Profil PK	
Długość efektywna	
mm	cal
526	20,7
560	22,1
575	22,6
582	22,9
597	23,5
633	24,9
648	25,5
655	25,8
673	26,5
682	26,9
698	27,5
710	28,0
730	28,8
740	29,1
755	29,7
775	30,5
790	31,1
805	31,7
818	32,2
830	32,7
841	33,1
865	34,1
875	34,5
884	34,8
888	35,0
903	35,6
915	36,0
938	36,9
954	37,6
970	38,2
990	39,0
1000	39,4
1015	40,0
1030	40,6
1037	40,8
1050	41,3
1080	42,5
1095	43,1
1110	43,7
1125	44,3

Profil PK	
Długość efektywna	
mm	cal
1146	45,1
1165	45,9
1194	47,0
1222	48,1
1230	48,4
1253	49,3
1272	50,1
1295	51,0
1330	52,4
1345	53,0
1360	53,6
1387	54,6
1397	55,0
1425	56,1
1435	56,5
1460	57,5
1479	58,2
1496	58,9
1520	59,9
1530	60,2
1560	61,4
1570	61,8
1580	62,2
1601	63,0
1626	64,0
1658	65,3
1682	66,2
1700	66,9
1725	67,9
1760	69,3
1775	69,9
1795	70,7
1815	71,5
1830	72,1
1854	73,0
1863	73,4
1885	74,2
1900	74,8
1930	76,0
1949	76,7

Profil PK	
Długość efektywna	
mm	cal
1980	78,0
2030	79,9
2050	80,7
2080	81,9
2100	82,7
2115	83,3
2120	83,5
2145	84,5
2170	85,4
2205	86,8
2225	87,6
2257	88,9
2330	91,7
2385	93,9
2440	96,1
2460	96,9
2480	97,6
2515	99,0
2530	99,6
2585	101,8
2612	102,8
2680	105,5
2835	111,6
2967	116,8
4122	162,3

Profil PL	
Długość efektywna	
mm	cal
954	37,6
991	39,0
1075	42,3
1270	50,0
1333	52,5
1371	54,0
1397	55,0
1422	56,0
1480	58,3
1562	61,5
1613	63,5
1664	65,5
1715	67,5
1764	69,5
1803	71,0
1841	72,5
1943	76,5
1981	78,0
2020	79,5
2070	81,5
2096	82,5
2134	84,0
2197	86,5
2235	88,0
2324	91,5
2362	93,0
2476	97,5
2515	99,0
2705	106,5
2743	108,0

Profil PL	
Długość efektywna	
mm	cal
2845	112,0
2895	114,0
2921	115,0
2997	118,0
3086	121,5
3124	123,0
3289	129,5
3327	131,0
3492	137,5
3696	145,5
4051	159,5
4191	165,0
4318	170,0
4470	176,0
4622	182,0
5029	198,0
5385	212,0
6096	240,0
7055	277,8

Profil PM	
Długość efektywna	
mm	cal
2286	90,0
2388	94,0
2515	99,0
2693	106,0
2832	111,5
2921	115,0
3010	118,5
3124	123,0
3327	131,0
3531	139,0
3734	147,0
4089	161,0
4191	165,0
4470	176,0
4648	183,0
5029	198,0
5410	213,0
6121	241,0
6502	256,0
6883	271,0
7646	301,0
8408	331,0
9169	361,0
9931	391,0
10693	421,0
12217	481,0
13741	541,0
15266	601,0